



®

# SPC Flooring 2026

- ☐ KD Panels 120 items
- ☐ ECO+ Laminates 210 items
- ☒ SPC Flooring 12 items
- ☐ TRUE+ Panels 120 items




## SPC Flooring Structure

Wood-Grain Flooring Size:  
182 mm (W) x 1500 mm (L) x 7.5 mm (T)

Stone-Grain Flooring Size:  
457 mm (W) x 800 mm (L) x 7.5 mm (T)

KD SPC Flooring combines true-to-life synchronized textures, waterproof stability, and commercial-grade durability to deliver a surface that performs beautifully in any environment. Certified safe and eco-friendly, it installs glue-free with no harsh odors and resists scratches, stains, and daily wear. The reliable click-lock system ensures fast, clean installation, while the easy-care finish keeps the floor looking new with minimal maintenance.

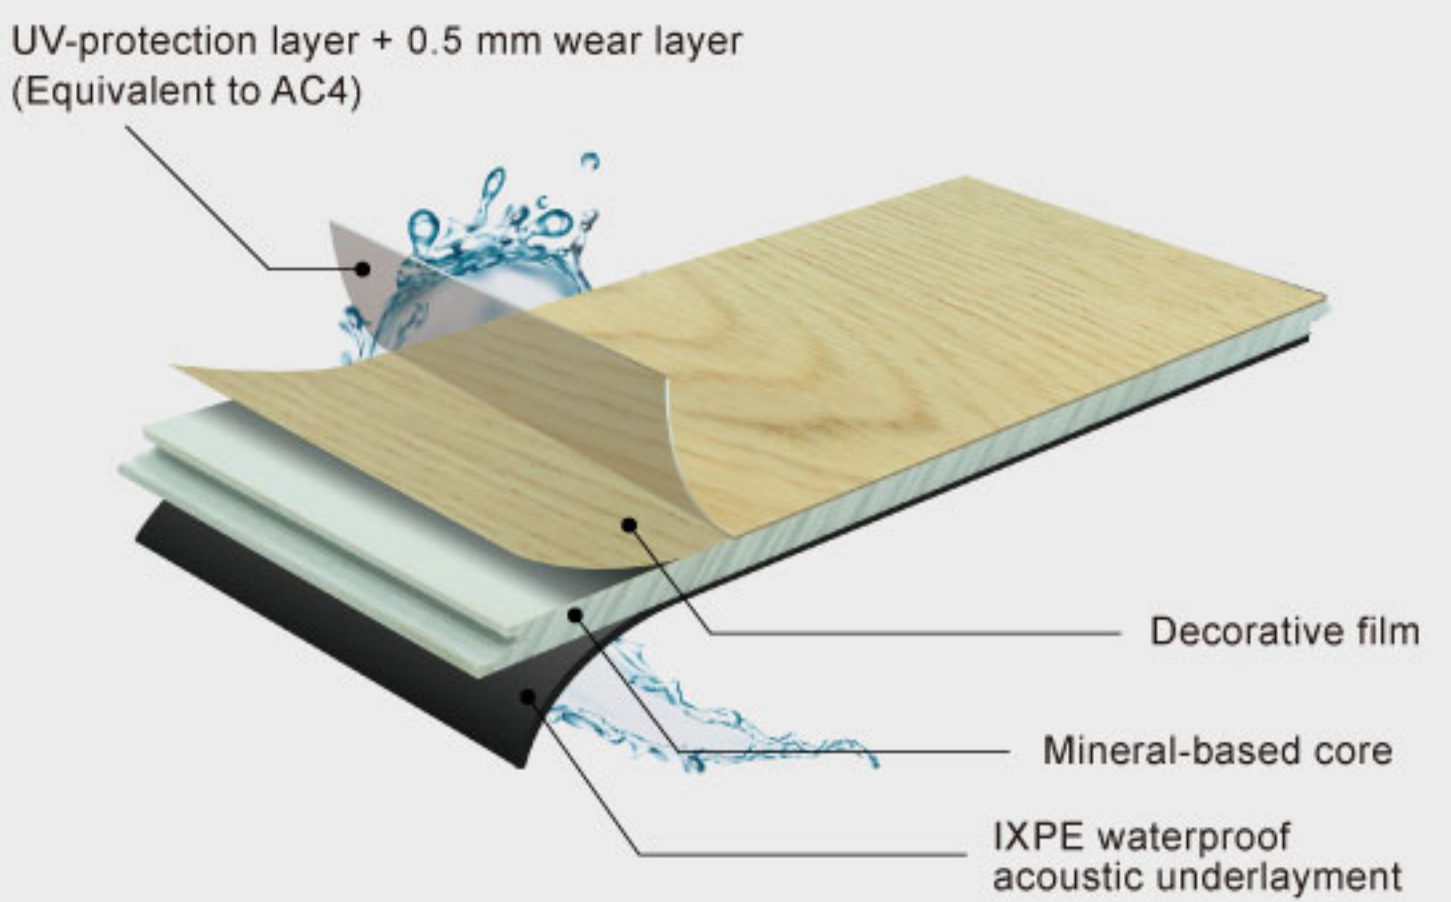

## Product Advantages

- **Exclusive Synchronized Texture**  
True-to-life wood and stone patterns with synchronized embossing for a natural, refined look and feel.
- **Commercial-Grade Durability**  
Strong wear layer resists scratches, claws, and abrasion, keeping the surface smooth and looking new.
- **International Safety & Eco Standards**  
Glue-free installation with no harsh odors. Certified safe and free from DEHP, organotin, and lead for a healthier home.
- **Quick Click Installation**  
The click-lock system enables quick, simple, and clean installation, reducing steps and saving both time and labor.
- **Waterproof & Moisture-Resistant**  
Prevents swelling, warping, and humidity damage—stable and reliable in any climate.
- **Stain-Resistant & Easy Care**  
The stain-shield surface blocks spills and daily grime; just sweep and mop to keep it clean with minimal effort.

## Certifications

- |                        |                           |                                 |
|------------------------|---------------------------|---------------------------------|
| ✓ Thermal Conductivity | ✓ Slip Resistance         | ✓ Formaldehyde Emissions        |
| ✓ Residual Indentation | ✓ Abrasion Resistance     | ✓ Formaldehyde & TVOC Emission  |
| ✓ Impact Resistance    | ✓ Fire & Flame Resistance | ✓ Floor Impact Sound Insulation |
| ✓ Moisture-Resistant   |                           |                                 |



Chiayi Production HQ  
Site Area: 110,000m<sup>2</sup>

Taipei Headquarters  
Floor Area: 25,000m<sup>2</sup>

**kd KEDING**

TECHNOLOGY · INNOVATION  
CULTIVATION · STEADY GROWTH







▶ **R287A** White Oak



▶ **R287B** White Oak



▶ **R287D** White Oak



▶ **R276J** Elm



▶ **R281A** Walnut



▶ **R281E** Walnut



▶ **R287E** White Oak



▶ **R276G** Elm




▶ **R276H** Elm



▶ **R281N** Walnut



▶ **R7002** Statuario Marble

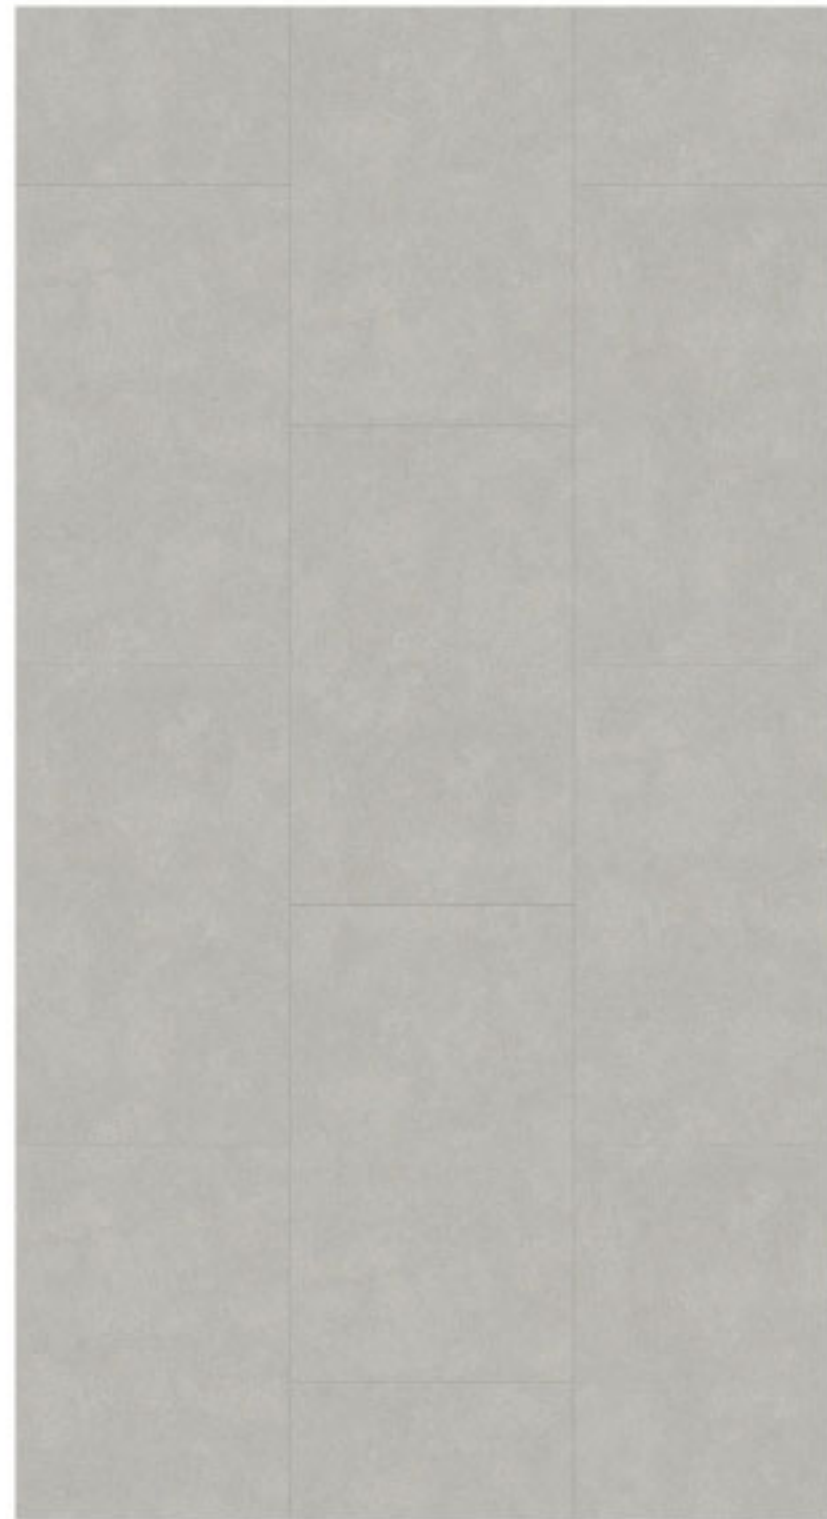


▶ **R7206** Slate


## Edge Finishing Products

mm


Transition Strip

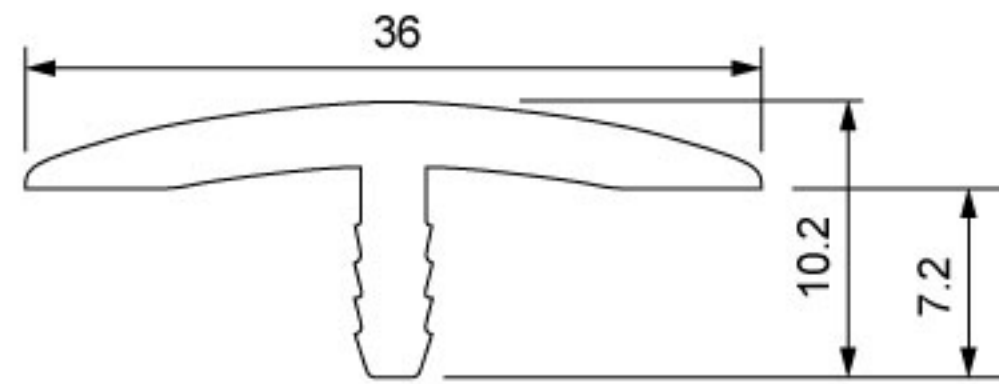

Starter Strip

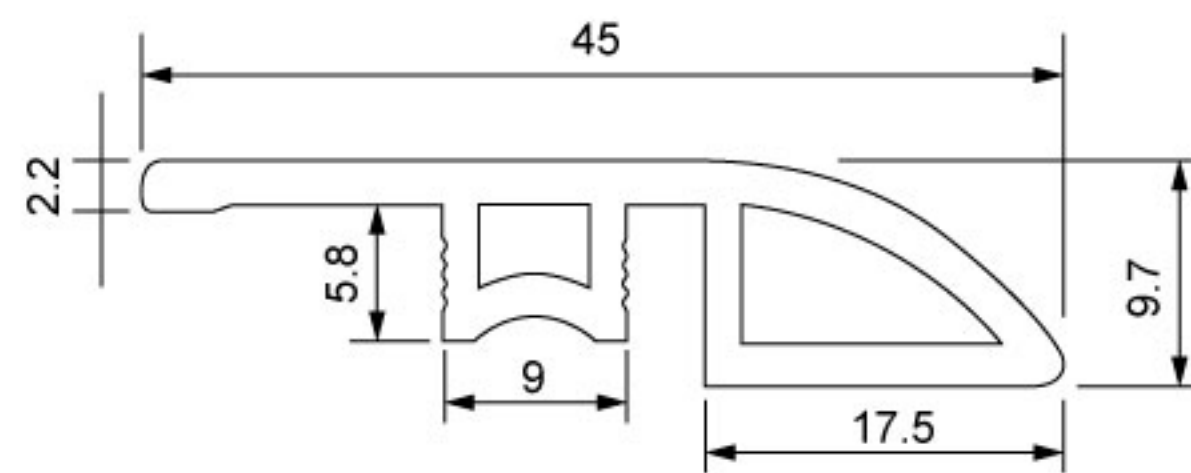

L-shaped Trim

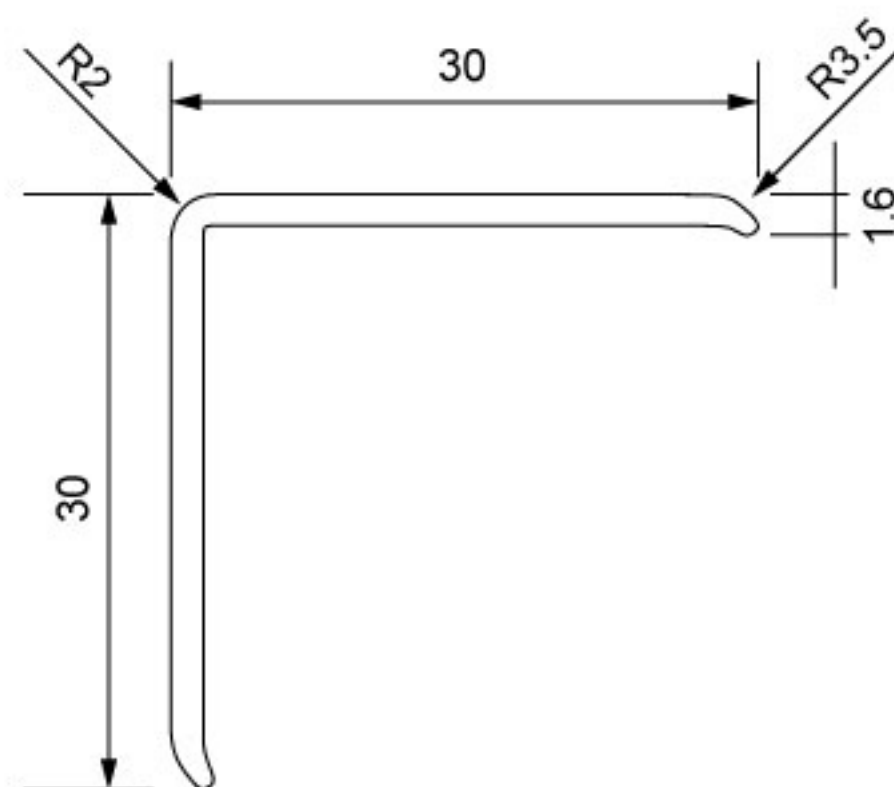

Color-Matched Silicone Caulk

