



Laminate Flooring

☐ KD Panels 54 items ☐ ECO+ Laminates 144 items

☒ **Laminate Flooring 24 items**



More About KD



Stock Symbol (TWSE) : 6655

Chiayi Production HQ
Area: 110,000m²

Taipei Headquarters
Area: 25,000m²




TECHNOLOGY · INNOVATION
CULTIVATION · STEADY GROWTH

Laminate Flooring Structure

Dimensions: Width 196 x Length 1835 x Thickness 12 mm
(including 2 mm soundproof underlay)

The brushed texture is perfectly synchronized with the wood grain, delivering an authentic wood look and feel. Certified AC4 wear and scratch resistance makes it ideal for high-traffic areas while the snap-fit technology allows for glue-free installation with seamless joints. Complying with low formaldehyde standards for a healthier environment, our Laminate Flooring features a moisture-resistant HDF high-density waterproof core and an IXPE waterproof, soundproof underlay to block moisture and noise, which ensures a comfortable and safe space for users.

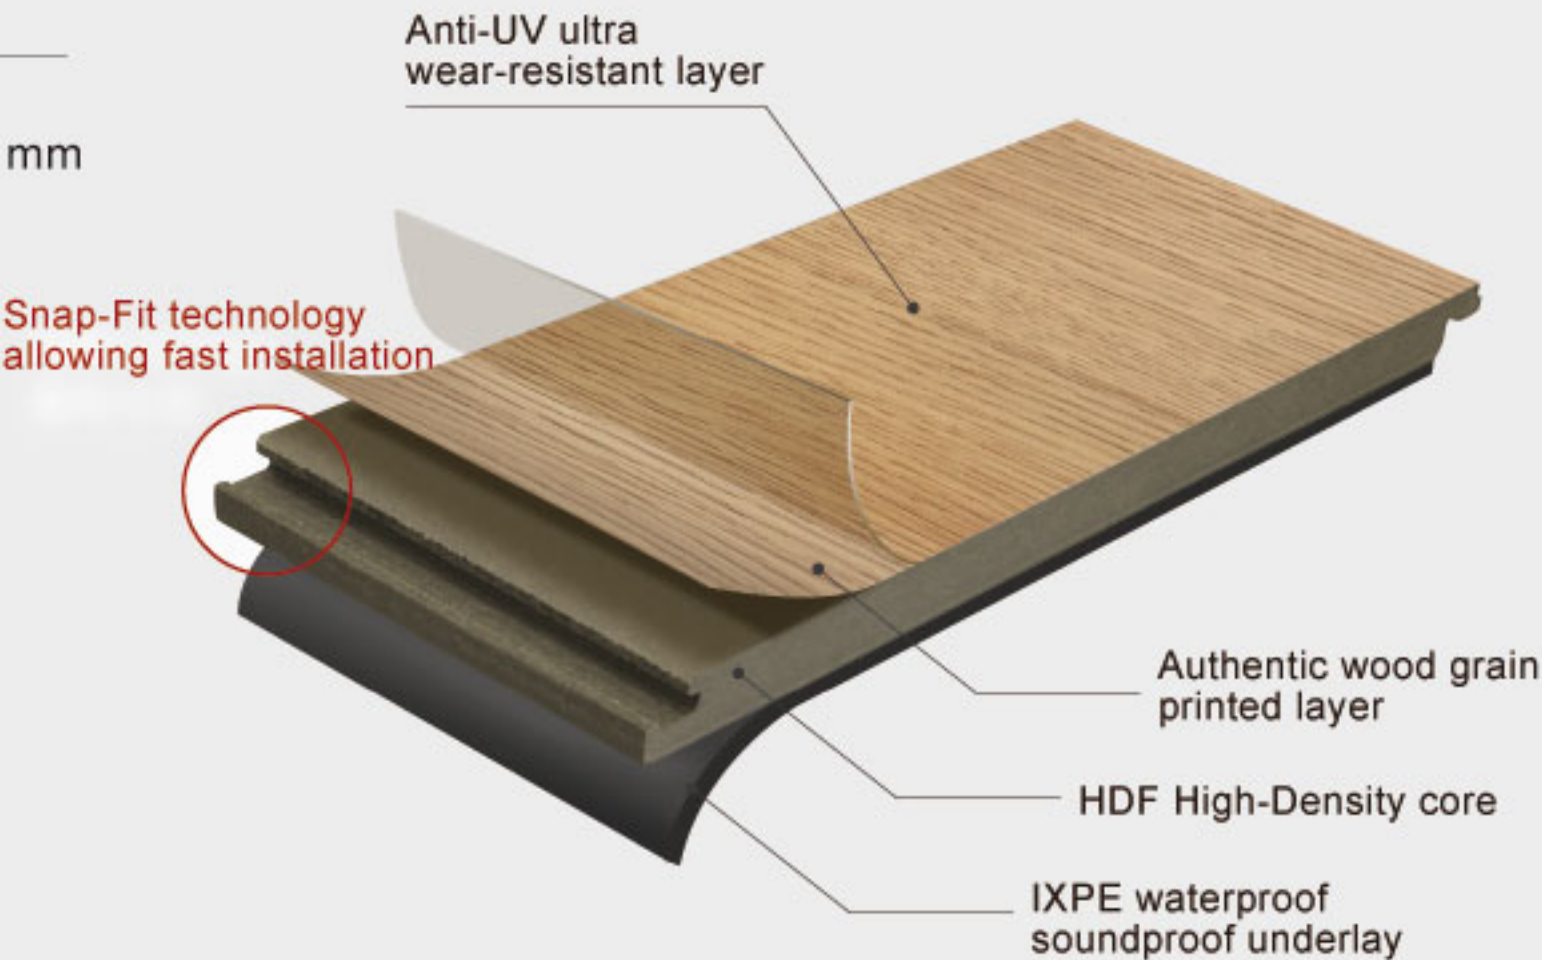

Product Advantages

Embossed-in-register technology

Embossed-in-register with realistic wood grain and tactile finishes, delivering a natural feel akin to real wood.

Certified AC4 wear and scratch resistance

AC4-compliant surface offers commercial-grade scratch and wear resistance, ideal for pets, heavy traffic.

Snap-Fit technology allowing fast installation

No glue or nails needed which removes formaldehyde risks. Simple installation ensures a tight and flawless finish.

Certified low formaldehyde national-level standards

Certified to Taiwan CNS and European low-formaldehyde standards, ensuring a healthy indoor environment.

IXPE waterproof soundproof underlay

The waterproof feature prevents water absorption and deformation while providing excellent noise reduction. Stable, durable, and eco-friendly.

HDF High-Density waterproof core

HDF core resists moisture, paired with a protective layer to enhance humidity resistance and reduce mold risk.

Certifications

- | | | | |
|------------------------|-------------------------------------|---------------------------------|-------------------------------------|
| ✓ Thermal conductivity | ✓ Moisture Resistant | ✓ Fire and Smoke Resistance | ✓ Abrasion Resistance |
| ✓ Bending performance | ✓ Coating Weather Resistance | ✓ Formaldehyde Emissions | ✓ Floor Impact Sound Insulation |
| ✓ Impact resistance | ✓ VOCs (Volatile Organic Compounds) | ✓ Panel Joint Height Difference | ✓ Formaldehyde & TVOC Emission Rate |







▶ **M287A** White Oak



▶ **M287B** White Oak



▶ **M287C** White Oak



▶ **M287H** White Oak



▶ **M287K** White Oak



▶ **M276A** Elm



▶ **M287D** White Oak



▶ **M287E** White Oak



▶ **M287F** White Oak



▶ **M276C** Elm



▶ **M276D** Elm



▶ **M276E** Elm



▶ M276F Elm



▶ M276G Elm



▶ M276H Elm



▶ M281A Walnut



▶ M281B Walnut



▶ M281C Walnut



▶ M276J Elm



▶ M276K Elm



▶ M276M Elm



▶ M281E Walnut



▶ M281H Walnut



▶ M281M Walnut

Edge Finishing Products



Transition Strip



End Molding




Starter Strip



Stair Nose Molding



L-shaped Trim

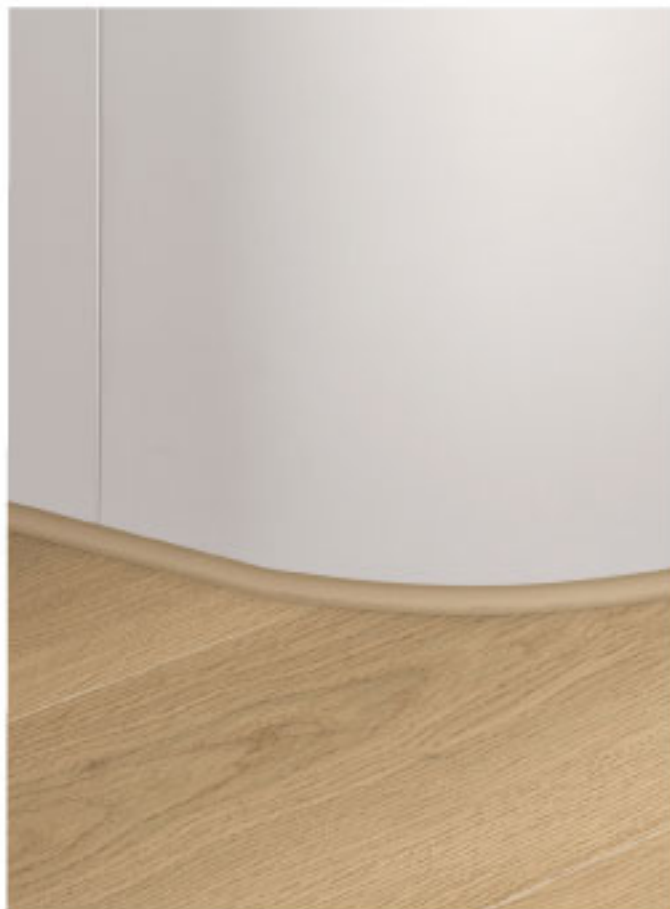

Color-Matched Silicone Caulk

00002508

